dyo



DYO COMPANY PRESENTATION

dyo | Dewilux | CASATI BOYA

Yaşar

Yaşar Holding is a leading corporate group in Turkey with market leader brands such as DYO & Pınar

Yaşar

21 Companies

24 Factories & Plants

7.500 Employees

2 Charitable Foundations

Coatings Division

- DYO Boya Fabrikaları
- Kemipex Joint-Stock Co.

Food & Beverages Division

- Pınar Süt
- Pınar Et
- Pınar Su
- Yaşar Birleşik Pazarlama
- Pınar Foods GmbH
- HDF FZCO

Agriculture & Animal Breeding & Fishery Division

- Çamlı Yem Besicilik Sanayi ve Ticaret A.Ş.

Trade & Service Division

- Altın Yunus Çeşme
- Bintur
- Yaşar Dış Ticaret
- **YADEX International GmbH**
- Desa Enerji
- Desa Elektrik
- Yabim
- Arev

Tissue & Paper Division

- Viking Kağıt ve Selüloz A.Ş.

"Durmuş Yaşar Establishment", a shop in İzmir's Şeritçiler Çarşısı district which Durmuş Yaşar opened in 1927 and from which he sold naval stores and paints, went on to become the core of what is today the Yaşar Holding, one of Turkey's leading corporate groups.

Yaşar

DYO is a leading paints & coatings manufacturer in Turkey

DYO Key Facts	
Group	Subsidiary of Yaşar Holding
Foundation	1954
Revenue (2018)	ca. ₺ 1.071 Million (~ € 189 Million)
Employees	1.078 employees
Production Capacity	~ 191.000 tons of paints and coatings per year
Production Facilities	DYO Çiğli Plant (capacity 91.000 tons) DYO Gebze Plant (capacity 100.000 tons)
International Presence	Production Plant Russia Distributors in France, Belgium, Holland, Romania and Bulgaria, Malta, Germany (49 countries)





DYO Headquarters (Çiğli Plant)

dyo | Dewilux | CASATI BOYA

Yaşar

WE TAKE OUR STRENGHT FROM **PRODUCTION**

190.000 m²	282.000 TONES	1100 EMPLOYEE
PRODUCTION AREA	PRODUCTION CAPACITY	LABOUR FORCE



ÇİĞLİ
124.000 m²



DİLOVASI
64.000 m²



RUSSIA
3.300 m²

OUR MILESTONES

1941
Turkey's local and **National paint brand**

1954
DYO Paint Factory was established

1965
First distribution system in the sector

1967
Turkey's **First Private Sector Painting Competition**

1980
First **color mixing system**

1982
Purchase of **Dewilux Brand**

1986
Sales operations in **Russia** started

2003
Sales Operations in **Russia and Egypt**























2003
First PTFE editing paint Self cleaning with rain

2005
First nanotechnology paint Self cleaning with light

2008
First Nano Patent from European Patent Office (EPO)

2009
First authorized R&D Center in the sector

2011
Hybrid Technology Product Dyojen

2014
Powder Coatings Factory was established

2017
Dyotherm Heat Insulation Systems production started

2018
Formaldehit Abating paint for the first time in Turkey

dyo | Dewilux | CASATI BOYA

Yaşar

DYO offers products in five main segments

DYO - Product Segments

1 Decorative Paints



Product Groups:

1. Water-Based Interior Wall Finish Paints
2. Water-Based Exterior Wall Finish Paints and Coatings
3. Metal and Wood Paints
4. Wood, Stain and Varnishes
5. Dr. DYO Products
6. Primers
7. Putties
8. Thinners

2 Furniture Paints



Product Groups:

1. Cellulosic Systems
2. Polyurethane Systems
3. Acrylic Systems
4. Polyester Systems
5. Water-Based Systems
6. Paving and Yacht Varnish
7. Wood Colors
8. Supporting Materials
9. Thinner
10. Dewimix

3 Industrial Paints



Product Groups:

1. Main Industrial
2. Coil Coating
3. Protective Coatings
4. Powder Coating
5. Polyester

4 Car Refinish



Product Groups:

1. Topcoats
2. Varnishes
3. Pastes
4. Primers
5. Hardeners
6. Other products

5 Marine Paints



Product Groups:

1. Synthetic Topcoat, Primer and Thinner
2. Toxic Primers and Paints
3. Epoxy Floor Paint, Primer, Putty and Thinners
4. Acrylic Floor Paint and Thinners
5. Other Thinners

dyo | Dewilux | CASATI BOYA

Yaşar

DYO decorative paint segment products cover a wide range of applications in the buildings



dyo | Dewilux | CASATI BOYA

Yaşar

Most preferred product groups in Dyo

Water-Based Interior Wall Finish Paints

								
Oxymax	Dyojen	Nanoipekmat	Teknoplast	Dinamik Silk	Dinamik Mat	Neostar Silicone	Dyopa	Ceiling Paint

Water-Based Exterior Wall Finish Paints

								
Akromax	Nanotex	Dyolasteks	Teknotex	Dinamik Exterior	Akrostar Silicone	Dyotek	Toitex	





Most preferred product groups in Dyo

Primers

			
Albin Primer	Transfer Primer	Teknotex Pigmented Primer	Pigmented Primer

Putties

	
Dyorit	Acrofiller

Wood Stain and Varnishes

	
Massiveline Water Based / Alkyd Series Special Wood Paint	Pinosan Alkyd Based Special Wood Protector

Dr. Dyo

			
Dyonem	Dyoflex	Dyostop	Dyotek

Metal and Wood Paints

	
Hidroten	Hidrolux

PRIMERS

DYOBINDER



- It is a transparent wall primer that can be used both inside and outside, reducing paint consumption.
- It penetrates the surface very well. Preparing a solid ground, it binds the finishing paint to the surface and reduces the consumption of paint.
- Stir well before use. Dyobinder is diluted with 7 times the volume of water, and it is fed to the surface by brush or roller. Before application, swollen, loose and unhealthy looking surfaces should be scraped, and oil and dirt should be wiped clean with water.

PRIMERS

ALBIN ASTAR



- It is a transparent, ready-to-use interior primer that reduces paint consumption and increases performance.
- It penetrates the surface very well. Preparing a solid ground, it ensures that the top coat paint adheres well to the surface. It improves paint performance and reduces paint consumption.
- It is ready for application. It does not require thinning. Before application, swollen, loose and unhealthy looking surfaces should be scraped, and oil and dirt should be wiped clean with water. Application is applied in one or two layers depending on the absorbency of the surface by brush or roller.

PRIMERS



TRANSFER PRIMER

- Interior wall primer especially used for the transfer from solvent-based paint to water-based paint as well as on internal plastered solid surfaces and for color transitions.

- Enables fine adhesion of the topcoat paint to the surface by preparing a solid surface. Increases the paint performance and reduces paint consumption. If a change is desired by applying water-based interior paint on solvent-based paint, it is used as a transition primer. Furthermore, used on all types of concrete, gas concrete, briquette, brick, plaster and similar mineral surfaces as an interior wall surface primer before the application of topcoat products.

- Blistered, loose and unfit surfaces should be scraped and the old synthetic-painted surface should be mildly sanded to remove oil and dirt. Dyo Transfer Primer is applied in a single coat with a brush or a roller after thinning with water by 10% of the volume.

dyo | Dewilux | CASATI BOYA

Yaşar

PRIMERS



EXPOSED CONCRETE PRIMER

- Acrylic emulsion based primer for gross concrete surfaces, walls and ceilings, which increases the adherence and working time of plaster and cement based plasters to the surface.

- It is an easy-to-apply primer that increases the adhesion of cement and especially gypsum based plaster mortars on gross concrete surfaces, indoors and outdoors, which prevents rapid water loss of these plasters, and increases working time and workability.

- Surface Preparation: All kinds of oil, grease, rust and paraffin residues that will weaken adherence should be removed from the surface and no loose particles should be on the surface.
- Priming: It is diluted with 30-50% water according to the desired consistency and mixed for 3-5 minutes and a homogenous and lump-free mixture is obtained, and then a single layer is applied to the prepared surface with lambskin roller. The product is mixed at certain intervals during the application

PRIMERS



TEKNOTEX PIGMENTED PRIMER

- It is an acrylic emulsion based exterior primer with a filling that prevents salt formation in the structure.

- As it has high water vapor permeability, it provides moisture to come out. It prevents salt formation in the structure. It prevents the paint to be applied on it from being absorbed differently by the surface. It has an effect on covering since it is filled.

- Surface Preparation: Dirty, dusty and loose textured surfaces should be cleaned. However, if the salt exit on the surface continues, application should not be performed until the causes caused by this are eliminated. Brush, roller or spraying method can be used for application.
- Priming: Teknotex Filled Primer is thinned by 10-20% in volume and applied as a primer on concrete, plaster and similar raw walls, interior and exterior surfaces as a primer before topcoat application. Top coat paint application should not be done before 6 hours.

PRIMERS



KIVASTAR

- Alkyd binder based synthetic primer paint.
- Does not leave brush marks, does not flow, adheres well to the surface and provides a smooth and solid surface for the top coat.
- Used as a primer under synthetic topcoat paints for the protection of wood and metal surfaces both indoors and outdoors.
- Surfaces should be cleaned of any dirt, rust and oil. If necessary, surface will be smoothed with Super Putty and sanded.
- Kivastar will be applied on wooden surfaces after the knots will be burned and saturated with Pinostar Decorative Wood Varnish Matt whereas it will be applied on metal surfaces after being primed with Antipas.
- 1 L Kivastar can be thinned with 50-100 mL of Synthetic Thinner for brush and roller application. Surface can be sanded after one day and top coat synthetic paints can be applied afterwards.
- Brushes and tools can be cleaned with Synthetic Thinner after the application.

PRIMERS




SYNTHETIC PRIMER

- It is an alkyd binder-based synthetic primer that can be used in interior and exterior walls, reduces consumption first, does not flow.
- It does not leave scars, does not flow, it adheres well to the surface, provides a smooth and solid surface for the top coat.
- Surface Preparation: On new wooden surfaces, knots are burned and saturated with Pinosan Decorative Wood Protector. When necessary, the surface is smoothed and sanded with Dyo Super putty.
- Painting: In brush and roller application, 1 L Primer Paint is thinned with 50-100 ml Dyo Synthetic Thinner, applied in a single coat. One day later, synthetic topcoat paints can be applied by sanding. After the application, the brushes and tools can be cleaned with Dyo Synthetic Thinner.

PRIMERS

ANTIPAS SYNTHETIC PRIMER

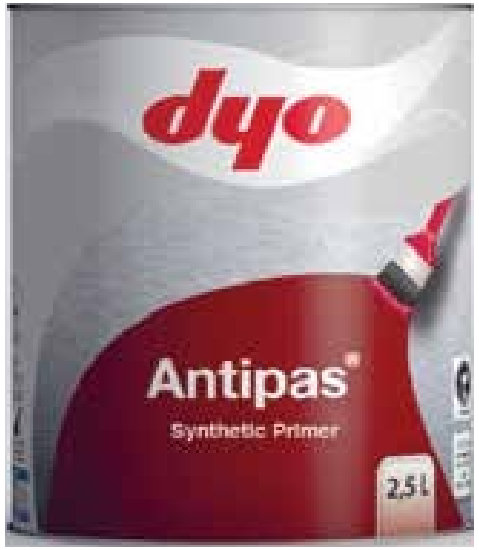

- Alkyd based solvent-borne, synthetic rust inhibiting primer.
- Resistant to humidity, and sea water. It adheres to surface well and dries quickly.
- Used as a rust inhibiting primer for all kinds of exterior and interior metal surfaces.
- Dirt, grease, oil, rust, old loose or flaking materials must be removed. Sandblasting and steel brush are recommended. Stir well before use. It can be applied by brush, roller and airless spray gun. If necessary, dilute with Dyo Synthetic Thinner (811-). 2 coats are applied with 8 hours break between coats.

PUTTIES

DYORIT



- PVA emulsion based interior wall putty for reparation of cracks and splits etc. on interior mineral substrates.
- It is resistant to water and humidity. It permits breathing of the wall, increases durability of topcoat paint which is applied onto it and reduces paint consumption.
- It is applied on every type of fine plastered substrate to get smooth, even surface
- Dirt, grease, flaking materials and fine sand particles on plaster is removed from the surface and primed with Dyobinder. It is applied with a large scraper. Surface smoothness is provided by sanding or by smoothening with wet felt before the putty dries.

PUTTIES



ACROFILLER

- Water Basedputty, based on acrylic emulsion.
- Exterior mineral facades; masonry, concrete, brick, cement etc. for reparation of cracks and splits etc.
- Ready to use. Apply one or two coats with a steel trowel or spatula. Before applying second coat, wait until first coat is completely dry.
- Dirt, grease, old loose or flaking materials must be removed from the surfaces. New mineral surfaces to be pre-treated with Dyobinder or Universal Primer. Before application on new plaster surface, it should be waited min. 4 weeks setting of cement. Old, weak, limed surfaces and chalky substrates to be pre-treated with Dyobinder. Before applying Acrofiller Wall Putty Exterior, wait 4 hours after Dyobinder and wait 1 day after Dyo Universal Primer application. Never use isolation primer

PUTTIES

ACROSUPER



- Water based acrylic emulsion putty for wooden surfaces.
- According to synthetic putty, it has higher filling, faster drying, easier application and sanding.
- Can be applied all types of wooden surfaces in order to smooth and fill the surfaces.
- Old painted, weak and chalky surfaces must be cleaned and then Pinosan Wood Protector Matt (transparent) (980-) can be applied for the protection of the wooden surface from weather, mould growth, fungi and worms. After priming, Akrosuper is appled with a scraper or a trowel

INTERIOR WALL FINISH PAINTS

OXYMAX



- It is produced by special technology in order to abate free formaldehyde from indoor air, pure acrylic emulsion based, multifunctional, silk-matt, scrub-resistant, decorative, indoor, topcoat paint.
- In particular, it absorbs the amount of harmful free formaldehyde in the indoor environment with special absorption technology and converts it into harmless water vapor to clean the indoor air.
- It is easy to apply, easy to wipe, has high coverage. It has excellent stain resistance and stains like ketchup, pencil, watercolor etc. can be easily removed.
- 24 hours after primer application, it is applied two coats by brush or roller with diluting 10-15 % of water by volume.

INTERIOR WALL FINISH PAINTS

DYOJEN



- Soft-matt, acrylic/PU emulsion based.
- Due to properties of binders in its structure, it prevents penetration of tea, coffee, coloured liquids and ink stains and provides easy cleaning of fingerprint, every kind of soot, dust and other surface stains by little effort differently than conventional paints.
- It is used on all types of interior surfaces of buildings.
- Thanks to its antibacterial property, it is suitable for interior places like hospital, hotel, restaurant, kitchen, shop, school, office etc.

INTERIOR WALL FINISH PAINTS

NANOIPEKMAT



- Produced with nanotechnology, it is silk-matt, decorative interior topcoat paint.
- Thanks to its photocatalytic property, it is able to clean itself with the help of light and thanks to this, it delays formation of dirts like nicotine and radiator soot on paint surfaces.
- It has scrubability property and provides easy cleaning of oil, ketchup, pencil, watercolour etc. stains by little effort. It can be applied and cleaned easily and has superior opacity.
- It is used on all types of interior surfaces of buildings.
- Thanks to its antibacterial property, it is suitable for interior places like hospital, hotel, restaurant, kitchen, shop, school, office etc

INTERIOR WALL FINISH PAINTS

NANOMAT



- Produced with nanotechnology, it is matt, decorative interior topcoat paint.
- Thanks to its photocatalytic property, it is able to clean itself with the help of light and thanks to this, it delays formation of dirts like nicotine and radiator soot on paint surfaces.
- It has scrubability property and provides easy cleaning of oil, ketchup, pencil, watercolour etc. stains by little effort. It is resistant to mould formation.
- It is used on all types of interior surfaces of buildings.

INTERIOR WALL FINISH PAINTS

TEKNOPLAST



- Acrylic emulsion based, silk-matt, interior topcoat paint containing PTFE additive.
- Thanks to PTFE additive, it has high oil repellency property and provides easy cleaning of stains like oil, ketchup, pencil, watercolour etc. by little effort.
- It is used on all types of interior surfaces of buildings.
- Thanks to its antibacterial property, it is suitable for interior places like hospital, hotel, restaurant, kitchen, shop, school, office etc.

INTERIOR WALL FINISH PAINTS

DINAMIK SILK MATT



- Silicone modified acrylic emulsion based, silk-matt, interior topcoat paint.
- Thanks to silicone additive, it has high water repellency property and provides easy cleaning of stains like ketchup, pencil, watercolour etc. by little effort.
- It is used on all types of interior surfaces of buildings.

INTERIOR WALL FINISH PAINTS

DINAMIK MATT



- Silicone modified acrylic emulsion based, matt, interior topcoat paint.
- Thanks to silicone additive, it has high water repellency property and provides easy cleaning of stains like ketchup, pencil, watercolour etc. by little effort.
- It is used on all types of interior surfaces of buildings.

INTERIOR WALL FINISH PAINTS

CEILING PAINT



- Matt, decorative ceiling paint based on acrylic emulsion.
- White ceiling paint with superior hiding power and breathability and attaches perfectly on all types of plaster, concrete, and lime surfaces.
- It is formulated for interior ceiling surfaces of buildings and should not be used for other applications.

EXTERIOR WALL FINISH PAINTS

NANOTEX



- Produced with nanotechnology.
- It is able to clean itself with the help of light.
- High water permeability, allowing building to breathe.
- It has high resistance against sunlight, humidity, alkaline. It has superior opacity. It is resistant to mould and bacterium.
- All types of exterior mineral facades; masonry, concrete, plaster, brick, tile, asbestos, cement etc.

EXTERIOR WALL FINISH PAINTS

ACROMAX



- 100% pure acrylic emulsion based exterior paint with semi-matt appearance.
- It has low dirt pick-up tendency, excellent durability against colour fading and high water vapour transmission.
- All types of exterior mineral facades; concrete, aerated concrete, brick, tile, plaster etc.

EXTERIOR WALL FINISH PAINTS

DYOLASTEKS



- Based on pure acrylic emulsion.
- It has high chemical, alkaline and salt resistance.
- It has high molecular weight and soft polymer property that provide retaining the elasticity under all weather conditions.
- High water repellent property provides dry surface.
- All types of exterior mineral facades; masonry, concrete, plaster, brick, tile, cement etc.

EXTERIOR WALL FINISH PAINTS

TEKNOTEX



- Based on acrylic emulsion.
- Thanks to PTFE additive, it has high dirt and water repellent property that provide rain to slide away without wetting the wall.
- High water permeability, allowing building to breathe.
- It is resistant to mould and bacterium. It has high chemical, alkaline and salt resistance.
- All types of exterior mineral facades; masonry, concrete, plaster, brick, tile, cement etc.

EXTERIOR WALL FINISH PAINTS

DINAMIK EXTERIOR



- Silicone modified acrylic emulsion based, matt exterior paint.
- Thanks to silicone additive, it has high water repellency property and water vapour permeabililty. High water permeability, allowing building to breathe.
- It is resistant to mould and bacterium. It has high sunlight, humidity and alkaline resistance. It has superior opacity.
- All types of exterior mineral facades; masonry, concrete, plaster, brick, tile, asbestos, cement etc. It shouldn’t be applied on elastic paint system.

EXTERIOR WALL FINISH PAINTS

AKROSTAR SILICONE



- Silicone modified acrylic emulsion based, matt exterior paint
- Thanks to silicone additive, it has high water repellency property and water vapour permeabililty. High water permeability, allowing building to breathe.
- All types of exterior mineral facades; masonry, concrete, plaster, brick, tile, asbestos, cement etc. It shouldn’t be applied on elastic paint system.

EXTERIOR WALL FINISH PAINTS

ACROSTAR TEXTURE



- Silicone modified acrylic emulsion based, matt textured exterior paint
- Thanks to silicone additive, it has high water repellency property. Water vapour permeability, allowing building to breathe.
- It has high resistance against sunlight, alkaline and salt humidity on coastal areas and negative effect of rain.
- All types of exterior mineral facades; masonry, concrete, plaster, brick, tile, asbestos, cement etc. It shouldn’t be applied on the elastic paint systems

EXTERIOR WALL FINISH PAINTS

PROFESIONAL EXTERIOR



- Water Based exterior paint, based on acrylic emulsion.
- It provides good adhesion to new and old surfaces
- All types of exterior mineral facades; masonry, concrete, plaster, brick, tile, cement etc.

EXTERIOR WALL FINISH PAINTS

DYOTEX



- Based on acrylic emulsion
- High water permeability, allowing building to breathe. It has high resistance against sunlight, humidity and alkaline.
- All types of exterior mineral facades; masonry, concrete, plaster, brick, tile, asbestos, cement etc. It shouldn’t be applied on elastic paint system.

METAL AND WOOD PAINTS

HIDROLUX



- Acrylic emulsion based, glossy decorative topcoat.
- It’s a human and environment-friendly product with odourless property. It’s resistant to water, domestic chemicals and impacts.
- It can be applied on all types of mineral substrates, wooden and metal surfaces after necessary treatment and priming.

METAL AND WOOD PAINTS

HIDROTEN



- Acrylic emulsion based, decorative, semi gloss interior topcoat.
- It’s a human and environment-friendly product with odourless property. It’s resistant to water, domestic chemicals and impacts.
- It can be applied on all types of interior wall paints, wooden and metal surfaces after necessary treatment and priming.

WOOD STAIN AND VARNISHES

MASSIVELINE WATER-BASED PARQUET VARNISH



- PU/Acrylic based Water-based, glossy parquet varnish.
- It provides perfect surface with its high film hardness, good scratch and impact resistance. It dries quickly and adheres well to applied surface. It’s resistant to water and domestic chemicals.
- All types of wooden parquet, stair and panel surfaces.

WOOD STAIN AND VARNISHES

MASSIVELINE WATER-BASED PARQUET FILLER VARNISH



- Acrylic emulsion based, waterborne, clear basecoat for wooden parquet surfaces.
- It has excellent sandability and easy application. Dries quickly, fills the conjuction parts between wood and parquet, also prevents wood to penetrate top coat varnishes. So, it reduces consumption of varnish. It provides smooth surface for top coat applications
- All types of wooden parquet, stair and panel surfaces.

WOOD STAIN AND VARNISHES

MASSIVELINE WATER-BASED WOOD VARNISH



- Acrylic emulsion based, Water-based, transparent, glossy decorative wood varnish.
- It provides breathable finish and blocks the humidity. It has good water repellency and resistance to yellowing, cracking and peeling. It dries quickly.
- Suitable for all kinds of wood used for interior and exterior joinery, wood siding, wood garden furniture, ready-coated plate surfaces looks like wood and also for panels.

WOOD STAIN AND VARNISHES

MASSIVELINE WATER-BASED DECK VARNISH



- Acrylic emulsion based, Water-based product formulated specially for timber decks.
- It provides anti-slip finish due to having invisible anti-slip micro beads. It's high water repellent and UV-resistant. It also resists cracking, blistering and peeling of the film caused by weather conditions. It dries quickly and enhances the natural beauty of wood.
- Suitable for all kinds of deck surfaces like walking roads, swimming pool and port sides.

WOOD STAIN AND VARNISHES

MASSIVELINE SPECIAL WOOD PAINT



- Acrylic emulsion based, semi gloss door paint with high opacity.
- Odourless, human and environmental friendly top coat paint.
- It’s resistant to water, domestic chemicals and impacts. It adheres well to the surface applied.
- It can be used on american panel doors and interior/exterior all wooden surfaces.

WOOD STAIN AND VARNISHES

MASSIVELINE WOOD PROTECTOR



- Acrylic emulsion based, Water-based, transparent, decorative wood protector.
- High degree of penetration and no film on wood surface. It provides a matt breathable finish and blocks the humidity. It is resistant to atmospheric effects.
- All types of new and weathered wood exposed outside and garden furniture.

WOOD STAIN AND VARNISHES

MASSIVELINE TEAK OIL



- It is a special product developed for an easy and quick maintenance of outdoor wooden surfaces and hardwoods like teak, mahogany and rosewood.
- It is very water repellent and UV-resistant due to its unique formulation. It has good protection against blue stain, mould growth, fungi and worms. It has high degree of penetration into the all species of wood and leaves the surface without any visual film. It provides a matt breathable finish.
- All types of wood exposed outside especially incontact with water such as flooring, swimming pool borders, decks and also for garden furniture.

WOOD STAIN AND VARNISHES

MASSIVELINE DECK VARNISH



- Solvent borne product formulated with natural oil for deck surfaces, exposed outside especially in contact with water
- It’s very water repellent, UV-resistant and anti-slip due to its unique formulation. It has high degree of penetration into the all species of wood and leaves the surface without any visual film. It provides a breathable finish. It also resists cracking and no need sanding for recoat applications.
- Suitable for all kinds of deck surfaces like walking roads, swimming pool and port sides.

WOOD STAIN AND VARNISHES

MASSIVELINE EXTERIOR WOOD VARNISH



- Alkyd based solvent-borne, transparent, one component, protective colored varnish.
- It adheres well to the surface applied. It’s waterproof and flexible. It forms a breathable film on wood. It can be absorbed easily by wood. Thanks to its special pigments, it has high resistance against sunlight and fading.
- All types of new and weathered wood exposed outside and garden furniture, sea vehicles, doors and windows.

WOOD STAIN AND VARNISHES

PINOSAN ALKYD BASED SPECIAL WOOD PROTECTOR



- Alkyd based solvent-borne, transparent, matt decorative wood protector.
- High degree of penetration and no film on wood surface.
- It provides a matt breathable finish and blocks the humidity.
- It is resistant to atmospheric effects and colors do not fade.
- All types of new and weathered wood exposed outside and garden furniture.

WOOD STAIN AND VARNISHES

PINOSAN VARNISHED WOOD PROTECTOR



- Alkyd based solvent-borne, transparent, varnished decorative wood protector.
- It has high degree of penetration and it forms a breathable semi matt film on wood surface. It is resistant to atmospheric effects and colors do not fade
- All types of new and weathered wood exposed outside and garden furniture.

WOOD STAIN AND VARNISHES

PARKETEX



- Urethane alkyd based solvent-borne, glossy, one component parquet varnish.
- Provides perfect surface with its gloss, high film hardness, high scratch and abrasion resistance. Protects the parquet and mosaic floors applied on; against tea, coffee and oil stains
- Used for parquet and all types of wood for protection against chemical and physical effects.

WOOD STAIN AND VARNISHES

PARKETEX



- Urethane alkyd based solvent-borne, glossy, transparent yacht varnish.
- Provides perfect surface with its gloss, high film hardness, high scratch and abrasion resistance. It’s resistant against sunlight and chemical effects.
- Used for wooden parts on boats and ships, and also for all types of interior and exterior wooden furniture.

DR. DYO PRODUCTS



DYONEM

- DYONEM is acrylic emulsion based paint which is designed for preventing condensation problem at humid areas like bathrooms and kitchens. With its velvet structure and warm surface it can be used for baby sleeping rooms and every type of interior areas. Its composition has two different effects.

- Physicothermal effect is provided by micro glass spheres which has insulation property. DYONEM forms insulating film by working as double glass system(glass/air/glass) on applied surfaces with the help of micro glass spheres. DYONEM has 3,5 times less heat transmission coefficient than other paints. Thanks to micro glass spheres and low heat transmission coefficient, it prevents condensation of water vapour on paint film and helps preventing of heat loss. Micro glass spheres in its composition make its surface warmer and contribute insulation.

- It is specially designed for humid areas. It can be used as problem solver at humid areas like kitchens and bathrooms and thanks to its warmer surface compared to other paints, it is also recommended for baby sleeping rooms. But it should not be used on surfaces which contact directly with water like shower edges.

DR. DYO PRODUCTS



DYOTEK

- Solvent borne odourless matt paint based on thermeoplastic resin, designed for interior mineral substrates with stain, soot or tobacco smoke / tar problems
- It blocks all kind of stains like graffiti, soot or tobacco smoke etc.
- All types of walls and ceilings in factories, bakeries, hotels, restaurants, bars, pubs and cafes.
- Ready to use.

DR. DYO PRODUCTS



DYOSTOP

- Solvent borne odourless, matt paint based on thermeoplastic resin, designed for interior mineral substrates.
- It blocks the dampness and humidity coming from the surface.
- All types of walls and ceilings where permanent and absolute waterproofing is necessary like basements , galleries , tunnels with high humidity
- Ready to use. Apply two coats with roller or brush, waiting 8 hours between coats.

DR. DYO PRODUCTS



DYOFLEX

- Acrylic emulsion based, water proofing sealer for roofs.
- Developed for roof and water insulation. Semi-fluid property provides covering the surface easily. High water vapour permeability, allowing building to breathe. It is %600 elastic. Maintains the elasticity under hot and cold differences. 24 hours later, tensile strenght is 25 kgf/cm² at 25°C. It has high resistance against sunlight, humidity and alkali. It is resistant to mould, fungus and moss growth. It provides decorative appearance, good adhesion and water resistant.
- APPLICATION AREA: Exterior masonry, concrete, plaster, brick, wood, fiber cement, roof boarding plates, roofs and terraces.
- Dirt, grease, old loose or flaking materials must be removed from the surfaces. It should be diluted with 40% (by volume) of water for application of the first priming coat with brush or roller. Apply min. 2-3 coats undiluted. Each coat must be applied in opposite direction of the previous coat. The surfaces on which it is to be applied should be sufficiently inclined so that water accumulation is not allowed

dyo



THANK YOU

dyo | Dewilux | CASATI BOYA

Yaşar